

# Installation Manual


## HORTI-UVPLUS




Éclairage DEL haute-performance pour horticulture  
High performance LED grow light  
Iluminación LED de alto rendimiento para horticultura

### INSTALLATION

1

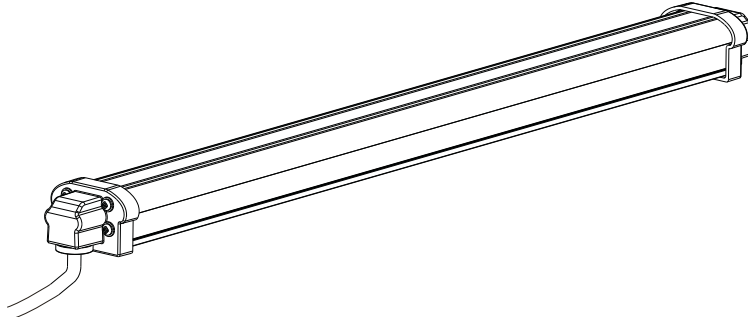


#### Physical Dimensions(Unit: mm/inch)

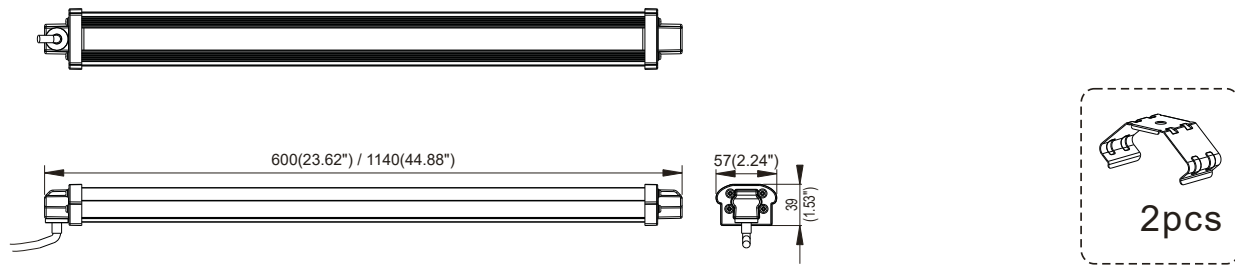

Product Specifications	30W	
Size (L x W x H)	600x57x39mm(23.62"x2.24" x 1.53")	1140x57x39mm(44.88"x2.24" x 1.53")
Weight (Driver included)	1.0±0.3kg (2.2±0.66Lbs)	2.0±0.3kg (4.4±0.66Lbs)
Input Voltage	100-240 VAC/100-277VAC	
Working Temperature	0°C to +40°C(-22°F to +104°F)	
Storing Temperature	-20°C to +65°C(-4°F to +149°F)	

L	brown	black
N	blue	white
⊕ GND	yellow/green	green

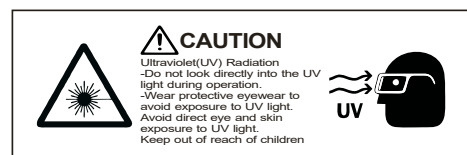

•if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.


# Installation Manual

## HORTI-UVPLUS




Éclairage DEL haute-performance pour horticulture  
High performance LED grow light  
Iluminación LED de alto rendimiento para horticultura

2

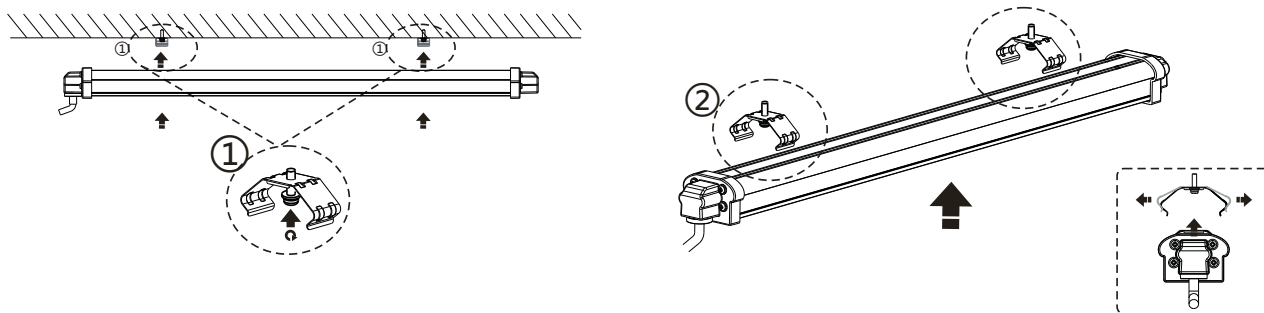

### Hanging installation

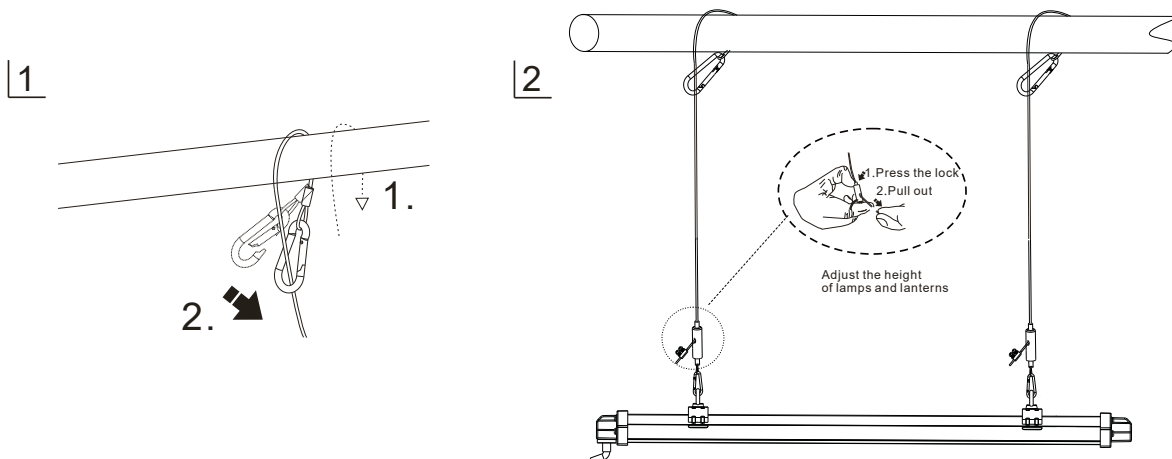

3

### SYSTEM ACCESSORIES

Image	Model Number	Description
	AC input Wire with 5-15P plug (Option if upgrade at time of purchase)	US Standard 3 plugs cord (vertical pin); Using three pin M15 connector; Black UL global wire; 17AWG; Length: 2 meter
	AC input wire with 6-15P plug (Option if upgrade at time of purchase)	US Standard 3 plugs cord ( <b>Horizontal pin</b> ); Using M15 three pin connector; Black UL global wire; 17AWG; Length: 2 meter
	Standard mounting clip	Stainless
	Mounting clip with ring (Option if upgrade at time of purchase)	Stainless
	Safety line cable to match with the mounting clip with ring (Option if upgrade at time of purchase)	Stainless



456 boul. des Laurentides, Piedmont (Québec) Canada J0R 1K0

514 627-4489 sales@futurvert.com